EE&S

www.eeas.cz

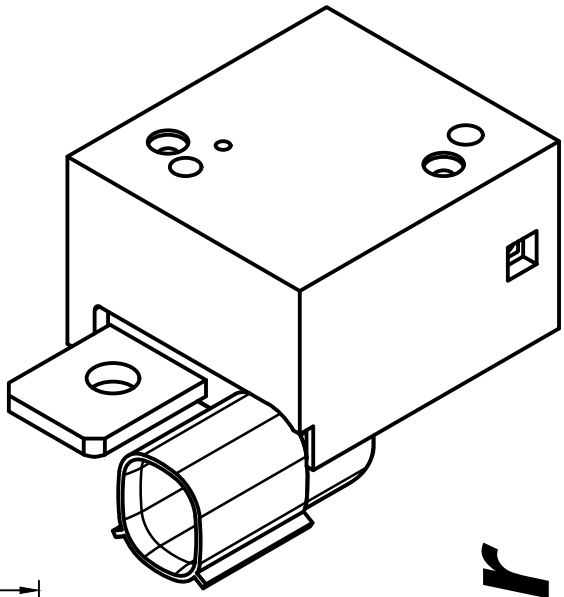

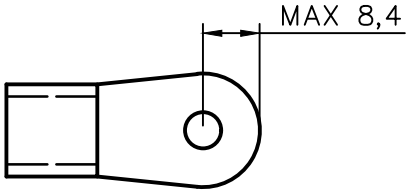

CABLE LUG MAX. DIM.

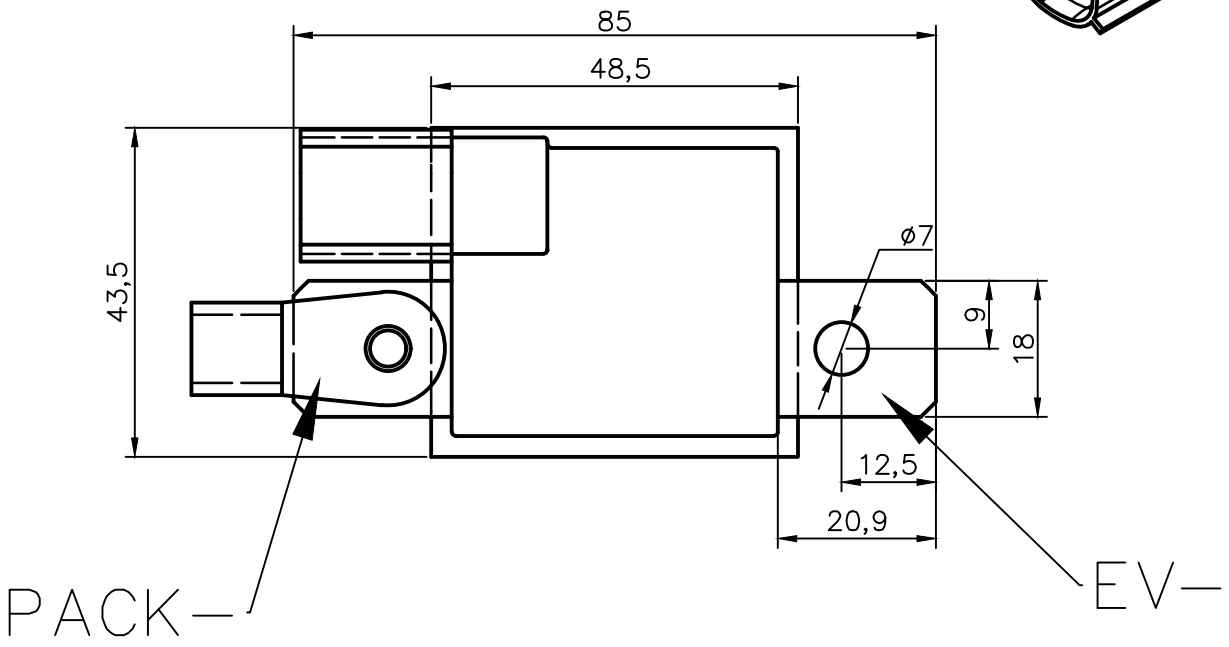

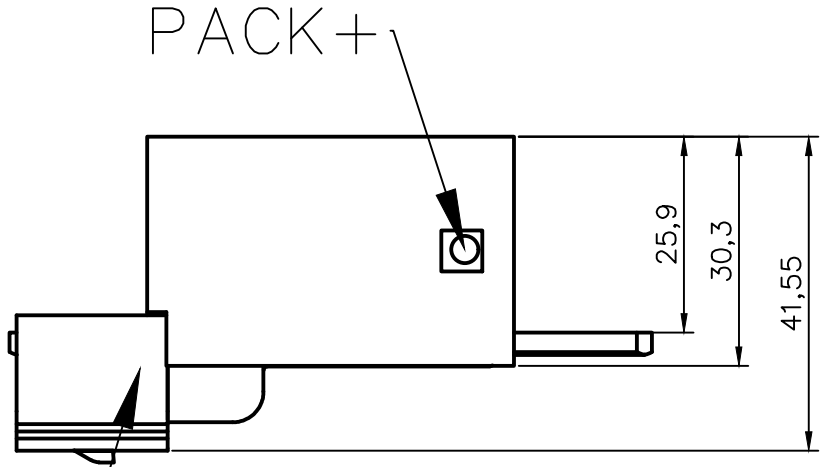

FSCzech Datalogger

DISCHARGE CURRENT DIRECTION IS FROM EV– TO PACK–
LV PORT CONNECTOR PN:MOLEX 33472–4001 + MOLEX 33012–2002
LV PINOUT: 1.LV+ 2.GND 3.CANH 4.CANL
LV VOLTAGE RANGE 9–36VDC
PACK+ CONNECTOR: AMPHENOL ANYTEK HB01018000J0G